

2016 V.6.0

Showcase

Food Warmer Cart



FWC-690



FWC-690-A



FWC-1480

Model	FWC-690	FWC-690-A	FWC-1480
Description	Food Warmer Cart	Food Warmer Cart	Food Warmer Cart
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	2620	2620	2620
Temperature Range	30~105°C	30~105°C	30~105°C
Dimensions(mm)	780×960×1755	790x975x1350	1540x940x1795
N.W.(KG)	182	136	320
Certificate	-	-	-

Food Warmer



FWH-13



FWH-14



FWH-1P



FW-1100

Model	FWH-13	FWH-14	FWH-1P	FW-1100
Description	Pizza Warming Showcase	Shelves Warming Showcase	Food Warmer	Food Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	850	850	850	3000
Temperature Range	30~85°C	30~85°C	30~85°C	-
Dimensions(mm)	500x450x770	500x450x770	350x425x500	1075x775x773
N.W.(KG)	27	27	16	61
Certificate	-	-	-	-

Food Warmer



FWH-6P

Model	FWH-6P	FWH-6P-B-L	FWH-8P
Description	Food Warmer	Food Warmer	Food Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	2900	2200	2000
Temperature Range	-	-	-
Dimensions(mm)	1550x810x885	1250x810x885	1500x750x840
N.W.(KG)	112	94	92
Certificate	-	-	-

Food Warmer



FWH-2P



FW-310



FWH-580

Model	FWH-2P	FW-310	FWH-580	FWH-805
Description	Food Warmer	Food Warmer	Food Warmer	Food Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1200	1000	1000	1500
Temperature Range	50~85°C	-	50~85°C	50~85°C
Dimensions(mm)	660x500x620	330x560x500	640x360x530	865x360x620
N.W.(KG)	27	7	21	35
Certificate	-	-	CE	CE

Food Warmer



FW-8



FW-10



FW-60

Model	FW-8	FW-10	FW-60	FW-80
Description	Food Warmer	Food Warmer	Food Warmer	Food Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	720	1000	750	1000
Temperature Range	-	-	-	-
Dimensions(mm)	800x710x650	1000x770x1570	600x700x1560	800x700x1560
N.W.(KG)	30	85	55	65
Certificate	-	-	-	-

Food Warmer



FW-2X2



FW-2D-WL

Model	FW-2X2	FW-2X3	FW-2D-WL	FW-3D-WL
Description	Food Warmer	Food Warmer	Food Warmer	Food Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	700	1600	1000	1500
Temperature Range	-	-	-	-
Dimensions(mm)	700x640x730	1100x640x730	740x590x620	740x590x885
N.W.(KG)	33	45	120	240
Certificate	-	-	-	-

Food Warmer



Model	FW-P-660	FW-P-900	FW-P-1200
Description	Pie Warmer	Pie Warmer	Pie Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1840	1840	2200
Temperature Range	50~85°C	50~85°C	50~85°C
Dimensions(mm)	660x437x635	900x480x590	1200x480x810
N.W.(KG)	37	50	72
Certificate	CE	CE	CE

Food Warmer



DH-260



DH-395

Model	DH-260	DH-395
Description	Food Warmer	Food Warmer
Volts	220~240V/50Hz	220~240V/50Hz
Power(W)	250	250
Temperature Range	50~85°C	50~85°C
Dimensions(mm)	500x360x260	500x360x395
N.W.(KG)	13	14
Certificate	CE	CE

Hot Displays



SD600-100



SD600-102



SD600-101

Standard Features:

- Adjustable temperature controller
- Non-adjustable chrome plated shelf
- Stainless steel

SD600-100	
Capacity-Gross(L)	25
Temperature range(?)	30-90
Rated Input Power(W)	800
N.W.(kg)	12.4
G.W.(kg)	14
Overall Dimension(mm)	554x376x311
Package Dimension(mm)	624x457x362
20"Container	276
40"Container	570
40"Container(high)	665

SD600-102	
Capacity-Gross(L)	45
Temperature range(?)	30-90
Rated Input Power(W)	800
N.W.(kg)	14.4
G.W.(kg)	16.5
Overall Dimension(mm)	554x376x376
Package Dimension(mm)	624x457x427
20"Container	230
40"Container	475
40"Container(high)	570

SD600-101	
Capacity-Gross(L)	35
Temperature range(?)	30-90
Rated Input Power(W)	800
N.W.(kg)	11.8
G.W.(kg)	13.5
Overall Dimension(mm)	554x361x311
Package Dimension(mm)	624x442x362
20"Container	288
40"Container	582
40"Container(high)	679

Hot Displays



SD600-103



SD600-104



SD600-105

Standard Features:

- Adjustable temperature controller
- Non-adjustable chrome plated shelf
- Stainless steel

Standard Features:


- Brilliant Internal LED illumination on sides
- Adjustable temperature controller
- Non-adjustable chrome plated shelf
- Stainless steel

SD600-103	
Capacity-Gross(L)	50
Temperature range(?)	30-90
Rated Input Power(W)	800
N.W.(kg)	13.7
G.W.(kg)	15.4
Overall Dimension(mm)	554x361x376
Package Dimension(mm)	624x442x427
20"Container	240
40"Container	485
40"Container(high)	582

SD600-104	
Capacity-Gross(L)	80
Temperature range(?)	30-90
Rated Input Power(W)	1000
N.W.(kg)	16.4
G.W.(kg)	18.5
Overall Dimension(mm)	700x400x376
Package Dimension(mm)	768x482x422
20"Container	180
40"Container	360
40"Container(high)	432

SD600-105	
Capacity-Gross(L)	115
Temperature range(?)	30-90
Rated Input Power(W)	1250
N.W.(kg)	19.7
G.W.(kg)	22.2
Overall Dimension(mm)	700x400x500
Package Dimension(mm)	768x482x548
20"Container	144
40"Container	288
40"Container(high)	288

Electric Warming Ttay

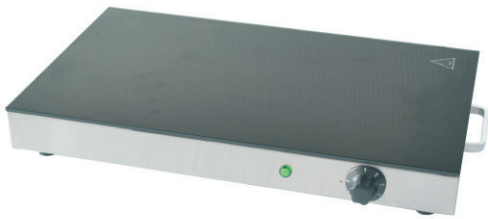

FW-TC1F-2



FW-TC2F-2

Model	FW-TC1F-2	FW-TC2F-2
Volts	220~240V/50Hz	220~240V/50Hz
Power(W)	260	325
Surface Material	Glass	Glass
Packing Size (mm)	410×295×550	640x430x120

Plate Warmer



PW-01



PW-03



PW-05

Model	PW-01	PW-03	PW-05
Description	Pie Warmer	Pie Warmer	Pie Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1200	750	400
Temperature Range	50~85°C	50~85°C	50~85°C
Dimensions(mm)	750x510x850	450x510x850	400x405x545
N.W.(KG)	50	32	21.5
Certificate	CE	CE	CE

Plate Warmer



RPW-G-D1E



RPW-G-R1E

Model	RPW-G-S1E	RPW-G-D1E	RPW-G-R1E
Description	Plate Warmer	Plate Warmer	Plate Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	400	800	400
Temperature Range	50~85°C	50~85°C	50~85°C
Dimensions(mm)	450x485x770	450x910x770	Φ405x775
N.W.(KG)	31	48	19
Certificate	CE	CE	-

Hot Showcase



FWS01-530V

Model	FWS01-530V	FWS01-540V	FWS01-550V
Description	Food Warmer	Food Warmer	Food Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	765	805	845
Capacity(L)	140	190	240
Shelves	2	2	2
Temperature Range	40~75°C	40~75°C	40~75°C
Dimensions(mm)	900x540x790	1200x540x790	1500x540x790
N.W.(KG)	80	95	110
Certificate	CE	CE	CE

Hot Showcase



FWS01-S530A

Model	FWS01-S530A	FWS01-S540A	FWS01-S550A
Description	Food Warmer	Food Warmer	Food Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	765	805	845
Capacity(L)	115	155	200
Shelves	2	2	2
Temperature Range	40~75°C	40~75°C	40~75°C
Dimensions(mm)	900x540x790	1200x540x790	1500x540x790
N.W.(KG)	90	115	120
Certificate	CE	CE	CE

Hot Showcase



FWS01-530A

Model	FWS01-530A	FWS01-540A	FWS01-550A
Description	Food Warmer	Food Warmer	Food Warmer
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	765	805	845
Capacity(L)	70	94	118
Shelves	2	2	2
Temperature Range	40~75°C	40~75°C	40~75°C
Dimensions(mm)	900x530x820	1200x530x820	1500x530x820
N.W.(KG)	50	65	75
Certificate	CE	CE	CE

Hot Displays



FCD07-120A



FCD07-160A

Standard Features:

- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Front curved glass
- Sliding doors



LED lights



Adjustable Shelf




Temperature Controller



Temperature Display


FCD07-120A

Capacity-Gross(L)	120
Temperature range(°C)	30-90
Rated Input Power(W)	1100
N.W.(kg)	48
G.W.(kg)	50
Overall Dimension(mm)	678x568x670
Package Dimension(mm)	749x627x731
20"Container	80
40"Container	164
40"Container(hing)	164

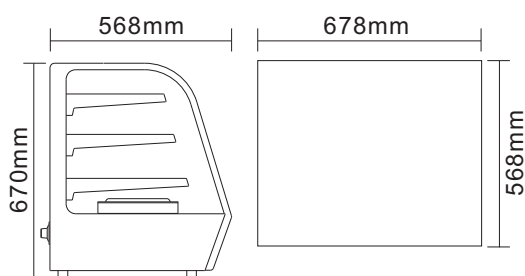

FCD07-160A

Capacity-Gross(L)	160
Temperature range(°C)	30-90
Rated Input Power(W)	1500
N.W.(kg)	56
G.W.(kg)	58
Overall Dimension(mm)	856x568x670
Package Dimension(mm)	928x627x731
20"Container	62
40"Container	124
40"Container(hing)	124

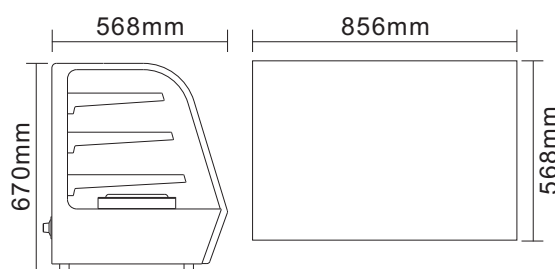

Hot Displays



FWS05-130V1



FWS05-160V2

Standard Features:

- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Front curved glass
- Sliding doors



LED lights



Adjustable Shelf




Temperature Controller



Temperature Display


FWS05-130V1

Capacity-Gross(L)	130
Temperature range(°C)	30-90
Rated Input Power(W)	1100
N.W.(kg)	47
G.W.(kg)	49
Overall Dimension(mm)	697x578x678
Package Dimension(mm)	749x627x731
20"Container	80
40"Container	164
40"Container(hing)	164

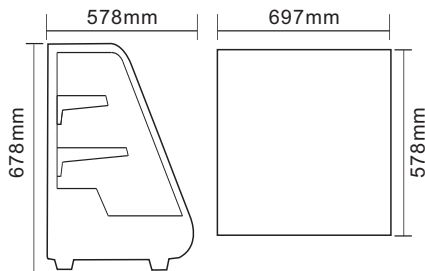

FWS05-160V2

Capacity-Gross(L)	160
Temperature range(°C)	30-90
Rated Input Power(W)	1500
N.W.(kg)	52
G.W.(kg)	54
Overall Dimension(mm)	875x578x678
Package Dimension(mm)	928x627x731
20"Container	62
40"Container	124
40"Container(hing)	124

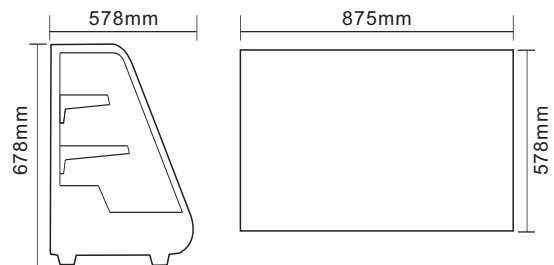

Hot Displays




FWS05-76V



FWS05-96V

Standard Features:

- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Front and back sliding doors



LED lights



Adjustable Shelf




Temperature Controller



Temperature Display


FWS05-76V

Capacity-Gross(L)	76
Temperature range(°C)	30-90
Rated Input Power(W)	1200
N.W.(kg)	21.2
G.W.(kg)	23
Overall Dimension(mm)	345x484x662.5
Package Dimension(mm)	408x551x695
20"Container	177
40"Container	357
40"Container(hing)	357

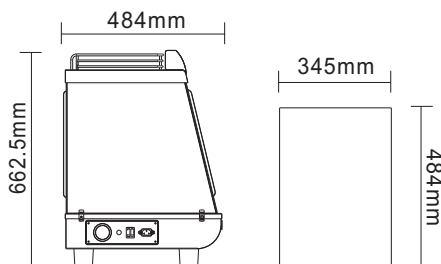

FWS05-96V

Capacity-Gross(L)	96
Temperature range(°C)	30-90
Rated Input Power(W)	1500
N.W.(kg)	33.5
G.W.(kg)	36
Overall Dimension(mm)	674.5x484x662.5
Package Dimension(mm)	738x551x695
20"Container	93
40"Container	189
40"Container(hing)	189

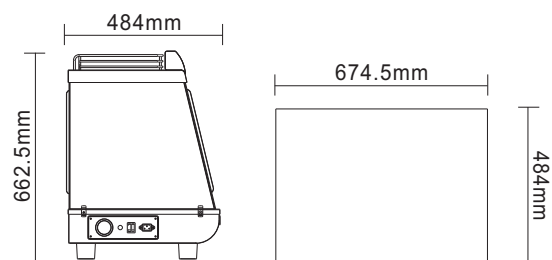

Hot Displays



FWS05-136V



FWS05-186V

Standard Features:

- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Front and back sliding doors



LED lights



Adjustable Shelf




Temperature Controller



Temperature Display


FWS05-136V

Capacity-Gross(L)	136
Temperature range(°C)	30-90
Rated Input Power(W)	1500
N.W.(kg)	41.5
G.W.(kg)	43.5
Overall Dimension(mm)	915x485x662
Package Dimension(mm)	974x551x695
20"Container	72
40"Container	144
40"Container(hing)	144

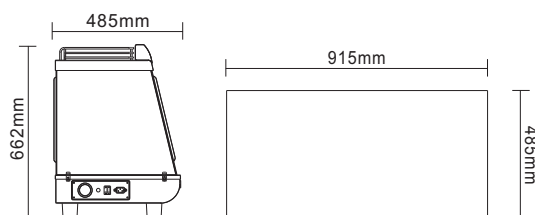

FWS05-186V

Capacity-Gross(L)	186
Temperature range(°C)	30-90
Rated Input Power(W)	1800
N.W.(kg)	53.5
G.W.(kg)	56
Overall Dimension(mm)	1214.5x484x662.5
Package Dimension(mm)	1278x551x695
20"Container	51
40"Container	108
40"Container(hing)	108

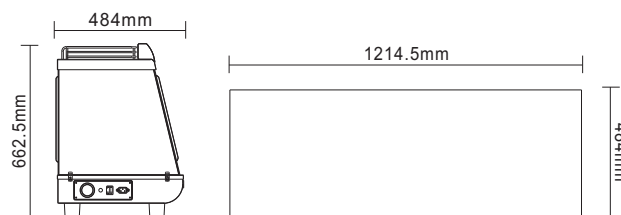

Hot Displays



FWS05-97V



FWS05-137V



FWS05-107V

Standard Features:

- Adjustable temperature controller
- Temperature display
- Adjustable chrome plated shelves
- Back doors
- Front top light box with decals



Adjustable Shelf



Temperature Display

FWS05-97V		FWS05-137V		FWS05-107V	
Capacity-Gross(L)	97	Capacity-Gross(L)	137	Capacity-Gross(L)	107
Temperature range(°C)	30-60/30-90	Temperature range(°C)	30-60/30-90	Temperature range(°C)	30-60/30-90
Rated Input Power(W)	1100	Rated Input Power(W)	1000	Rated Input Power(W)	1000
N.W.(kg)	22	N.W.(kg)	27	N.W.(kg)	22.5
G.W.(kg)	24	G.W.(kg)	29	G.W.(kg)	24.5
Overall Dimension(mm)	460X448X785	Overall Dimension(mm)	645X487X785	Overall Dimension(mm)	645X487X657
Package Dimension(mm)	534X537X833	Package Dimension(mm)	719X537X833	Package Dimension(mm)	719X537X705
20"Container	80	20"Container	68	20"Container	102
40"Container	168	40"Container	138	40"Container	207
40"Container(hing)	252	40"Container(hing)	207	40"Container(hing)	207

Hot Displays



FWS05-97V2



FWS05-108V



Adjustable Shelf



Temperature Display

Standard Features:


- Adjustable temperature controller
- Temperature display
- Rotational chrome plated shelves
- Front top light box with decals

Standard Features:

- Brilliant Internal LED illumination on sides
- Adjustable temperature controller
- Temperature display
- Rotational chrome plated shelves
- Adjustable feet


FWS05-97V2

Capacity-Gross(L)	97
Temperature range(°C)	30-60/30-90
Rated Input Power(W)	1100
N.W.(kg)	22
G.W.(kg)	24
Overall Dimension(mm)	460x448x785
Package Dimension(mm)	534x537x833
20"Container	80
40"Container	168
40"Container(hing)	252

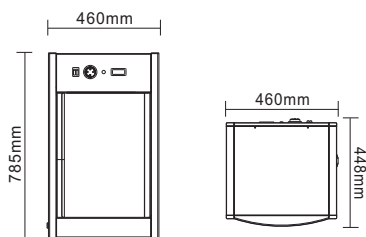

FWS05-108V

Capacity-Gross(L)	108
Temperature range(°C)	30-90
Rated Input Power(W)	1200
N.W.(kg)	33
G.W.(kg)	35
Overall Dimension(mm)	470x470x870
Package Dimension(mm)	560x530x938
20"Container	88
40"Container	176
40"Container(hing)	176




Hot Displays



FWS05-60V



FWS05-110V

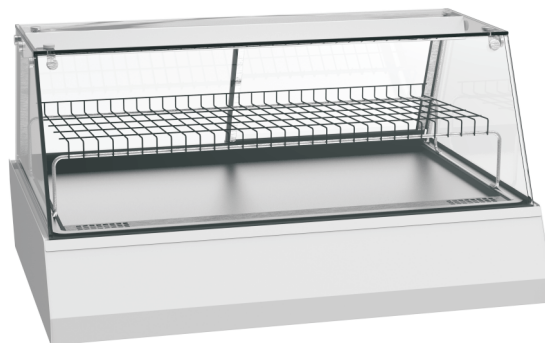

FWS05-156V

Standard Features:

- Brilliant Internal LED illumination on top
- Adjustable temperature controller
- Non-adjustable chrome plated shelf
- 4 side single glass
- Front flat glass
- Sliding doors
- Adjustable feet
- Ventilated heating system
- Stainless steel

FWS05-60V		FWS05-110V		FWS05-156V	
Capacity-Gross(L)	60	Capacity-Gross(L)	110	Capacity-Gross(L)	156
Temperature range(°C)	30-90	Temperature range(°C)	30-90	Temperature range(°C)	30-90
Rated Input Power(W)	1600	Rated Input Power(W)	2300	Rated Input Power(W)	3200
N.W.(kg)	36.2	N.W.(kg)	51.2	N.W.(kg)	66.2
G.W.(kg)	38.2	G.W.(kg)	53.5	G.W.(kg)	68.2
Overall Dimension(mm)	450x775x610	Overall Dimension(mm)	750x775x610	Overall Dimension(mm)	1080x775x610
Package Dimension(mm)	540x810x671	Package Dimension(mm)	840x810x671	Package Dimension(mm)	1170x810x671
20"Container	84	20"Container	42	20"Container	42
40"Container	171	40"Container	84	40"Container	84
40"Container(hing)	171	40"Container(hing)	84	40"Container(hing)	84

Hot Displays



FWS03-R3D



FWS03-R2D

Model	FWS03-R3D	FWS03-R2D
Description	Showcase	Showcase
Volts	220~240V/50Hz	220~240V/50Hz
Power(W)	1300	900
Dimensions(mm)	940x510x620	660x480x600



FWS03-P330



FWS03-P700



FWS03-P950

Model	FWS03-P330	FWS03-P700	FWS03-P950	FWS03-P1200
Description	Showcase	Showcase	Showcase	Showcase
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1200	1500	1600	2300
Dimensions(mm)	330x490x660	700x490x660	950x480x600	1200x480x600

Hot Display



FWS03-TG380



FWS03-TG650



FWS03-TG900

Model	FWS03-TG380	FWS03-TG650	FWS03-TG900
Description	Showcase	Showcase	Showcase
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1200	1200	1600
Dimensions(mm)	380x490x560	650x490x580	900x490x580

Soup Kettle



KG-570B



KB-570SHN



TS-1300B

Model	KG-570B	KB-570SHN	TS-1300B
Description	Soup Kettle	Soup Kettle	Soup Kettle
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	300	300	600
Capacity(L)	5.7	5.7	13
Dimensions(mm)	280x280x395	280x280x395	400x400x420
N.W.(KG)	3.3	3.3	5.8
Certificate	CE	CE	CE

Soup Kettle



TS-6000B



TS-6000S

Model	TS-6000B	TS-6000B-C	TS-6000S	TS-6000S-C
Description	Soup Kettle	Soup Kettle	Soup Kettle	Soup Kettle
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	400~475	400~475	400~475	400~475
Capacity	10	10	10	10
Dimensions(mm)	340X340X360	340X340X360	340X340X360	340X340X360
N.W.(KG)	4.7	4.6	4.4	4.5
Certificate	CE	CE	CE	CE

Bain Marie



EBM-3PB



EBM-6PA



EBM-4PA

Model	EBM-3PB	EBM-4PA	EBM-4PB	EBM-6PA
Description	Bain Marie	Bain Marie	Bain Marie	Bain Marie
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1500	1500	1500	1500
Remark	For three 1/3x6" Gastronome	For Four 1/2x6" Gastronome	For Four 1/2x4" Gastronome	For Six 1/3x6" Gastronome
Dimensions(mm)	615x354x255	615x354x255	630x370x295	355x600x360
N.W.(KG)	10	10.5	12	12
Certificate	CE	CE	CE	CE

Bain Marie



KG-165



KG-165F



KG-205



EBM-2SK

Model	KG-165	KG-165F	KG-205	EBM-2SK
Description	Bain Marie	Bain Marie With Faucet	Bain Marie With Faucet	Table-Top Bain Marie
Volts	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz	220~240V/50Hz
Power(W)	1200	1200	1200	1200
Temperature Range	30-200°C	30-200°C	30-200°C	30-200°C
Dimensions(mm)	615x357x255	370x570x230	354x615x295	355x600x360
N.W.(KG)	10	10.5	12	12
Certificate	CE	CE	CE	CE

Digital Warmer



50°C~100°C

SD400-100
(Dry Heat)

Digital Cooker



20°C~100°C

CE700-142

Model	SD400-100	CE700-142
Description	1/4 GN Container&Cover x2Pcs	1/ 2 GN
Volts	220~240V/50Hz	220~240V/50Hz
Power(W)	250	1000
Material	S/S#201	S/S
Temperature Range	50°C~100°C	20°C~100°C
Dimensions (mm)	285x345x300	285x345x300

Heat Lamp



HTL02-S2L



HTL02-G2



HTL02-G2Y

Model	HTL02-S2L	HTL02-G2	HTL02-G2Y
Description	Heat Lamp Cover	Heat Lamp Cover	Heat Lamp Cover
Volts	110~120V/60Hz 220~240V/50Hz	110~120V/60Hz 220~240V/50Hz	110~120V/60Hz 220~240V/50Hz
Material	Aluminum	Aluminum	Aluminum
Color	Sanding Finish	Rose Gold	Yellow Gold
Spring Dimensions(mm)	31~139.5	31~139.5	31~139.5
Lamp Cover(mm)	21.9xΦ22.8	21.9xΦ22.8	21.9xΦ22.8
N.W.(KG)	2	2	2
Certificate	CE	CE	CE